




LANCERTM
EMPOWERING FARMERS

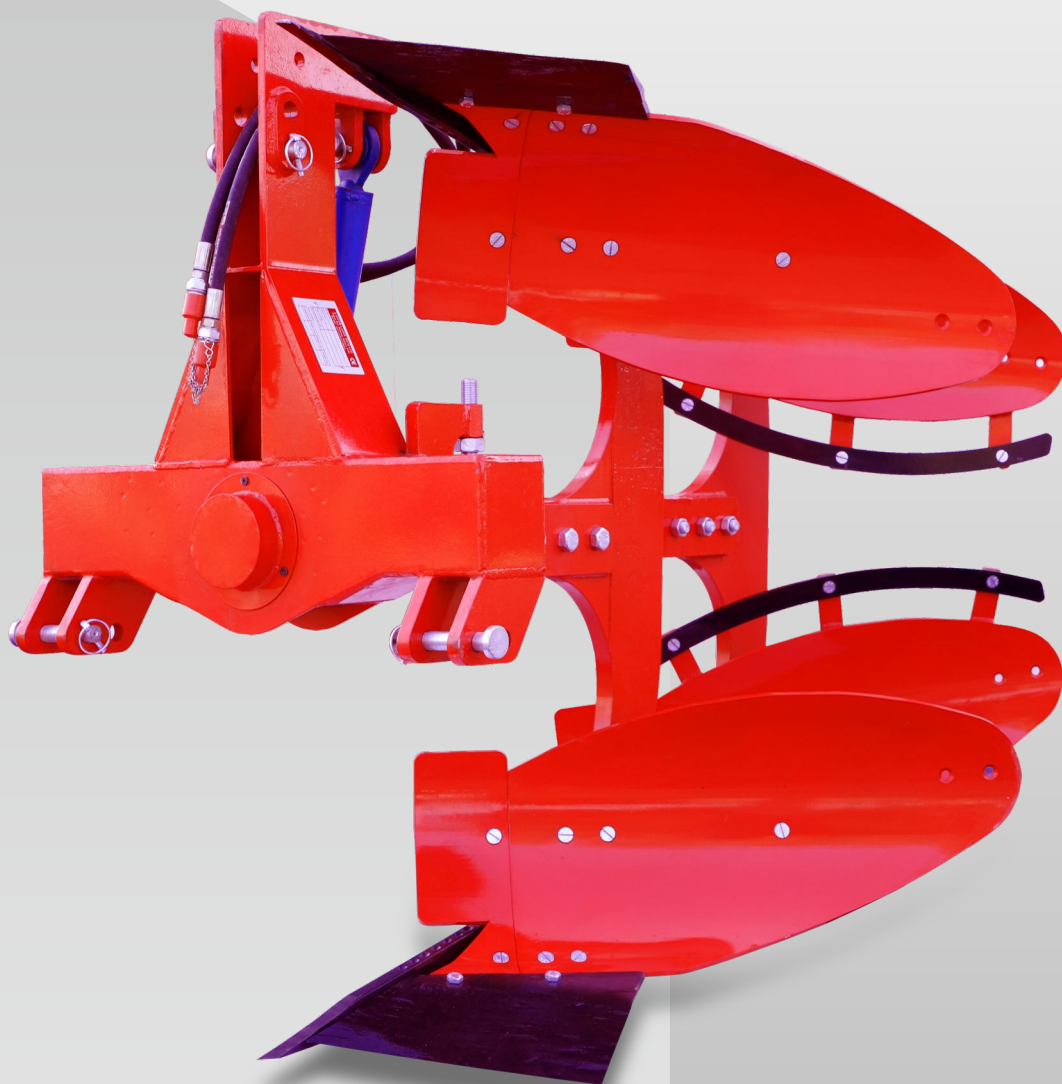

PLOUGH **DHANUSH LRP**

Model : 232-235-236-243-245-247-250
Require HP: 30 to 60
Require KW: 22 to 45

Features / Características / Caractéristiques



High Quality Hydraulic Unit



High Quality Oil Seal and
Bearing on Main Shaft



Premium Shear and Shear
Bar for Longer Life



More Durable by
Minimize welding



Virgin Material for Extra
Rigidity and Smooth Finish



Lancer LRP series Hydraulic Reversible Plough is range of double & Triple Furrow, Which can be coupled with 30 to 60 HP tractors. It is mainly Made from Virgin Material with rigid structure, High Strength material in tines and furrow with perfect mold to reduce load on tractor and Ploughing made easy for all Farmers.

Standard Equipment

- Plough Side Hydraulic Unit.
- Advanced Tool Kit.
- Three Point Hitch Cat II.

On Request

- Kachhua Shear Blade.
- Tractor side Distribution Kit
- Size of Shear Width



El arado hidráulico reversible de la serie Lancer LRP es una gama de surcos dobles y triples, que se pueden acoplar a tractores de 30 a 60 HP. Está hecho principalmente de material virgen con estructura rígida, material de alta resistencia en púas y surcos con molde perfecto para reducir la carga en el tractor y el arado es fácil para todos los agricultores.

Equipamiento estándar

- Unidad hidráulica del lado del arado.
- Kit de herramientas avanzado.
- Enganche de tres puntos Cat II.

Bajo pedido

- Hoja de cizalla Kachhua.
- Kit de distribución lateral del tractor
- Tamaño del ancho de corte



La charrue réversible hydraulique de la série Lancer LRP est une gamme de sillons doubles et triples, qui peuvent être couplés à des tracteurs de 30 à 60 CV. Il est principalement fabriqué à partir de matériaux vierges avec une structure rigide, un matériau à haute résistance dans les dents et le sillon avec un moule parfait pour réduire la charge sur le tracteur et un labour facile pour tous les agriculteurs.

Équipement standard


- Unité hydraulique côté charrue.
- Trousse d'outils avancée.
- Attelage trois points Cat II.

Sur demande

- Lame de cisaillement Kachhua.
- Kit de distribution côté tracteur
- Taille de la largeur de cisaillement

Technical Details / Detalles técnicos / Détails techniques

Model No.		Unit	DL 232	DM 235	DL 236	DM 243	DM 245	DM 247	DM 250	DM 252
Power Requirement		HP	30 - 45	35 - 45	35 - 45	40 - 60	45 - 60	45 - 60	50 - 60	50 - 60
		KW	22 - 33	26 - 33	26 - 33	29 - 45	33 - 45	33 - 45	37 - 45	41 - 45
Require Tractor Rear Tyre		Inch	12.4.28	13.6.28	13.6.28	13.6.28, 14.9.28	14.9.28	14.9.28	16.9.28	16.9.28
Main Frame		mm	100x25	100x25	100x25	100x25	100x30	100x30	100x30	100x30
Overall Height		Inch	48	48	48	51	51	51	51	51
Working Width		Inch	24	24	26	26	28	32	32	36
Tines Thickness		mm	30	32	30/35	25	30	30	35	35
Tines Shape			C	3	C	C	C	C	C	C
Mould Board Thickness		mm	8	6	8	6	8	8	10	10
Distance Between Two Tines		Inch	10	10	10	10	11	14	12	16
Shear Length		Inch	14	14	15	15	16	16	18	18
Shear Thickness		mm	12	12	12	12	12	12	12	12
Weight		Kg.	320	350	360	450	470	480	520	530
		lbs	705	772	794	992	1036	1058	1146	1168

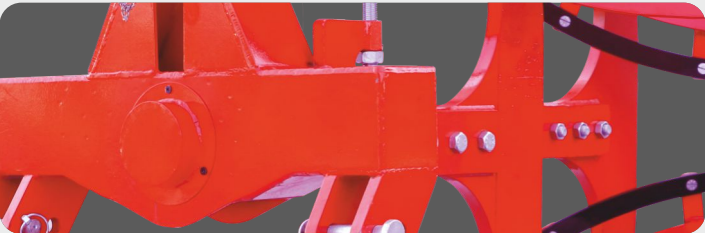

LANCER LASER TECH LTD.

Survey No-1434P/2, Chhatral-Mehsana Highway, AT Rajpur, Ta-Kadi, Dist. Mehsana, Gujarat, India. 382715.
☎ +912764-278801 / 02 / 03 / 04 ✉ sales@lanceragrico.com 🌐 www.lanceragrico.com 📠 +91 88 99 33 55 33

किसानो का साथी 