




ROTARY TILLER RF SERIES

Model : 80
Require HP : 18 to 25
Require KW : 13 to 19

Features / Características / Caractéristiques

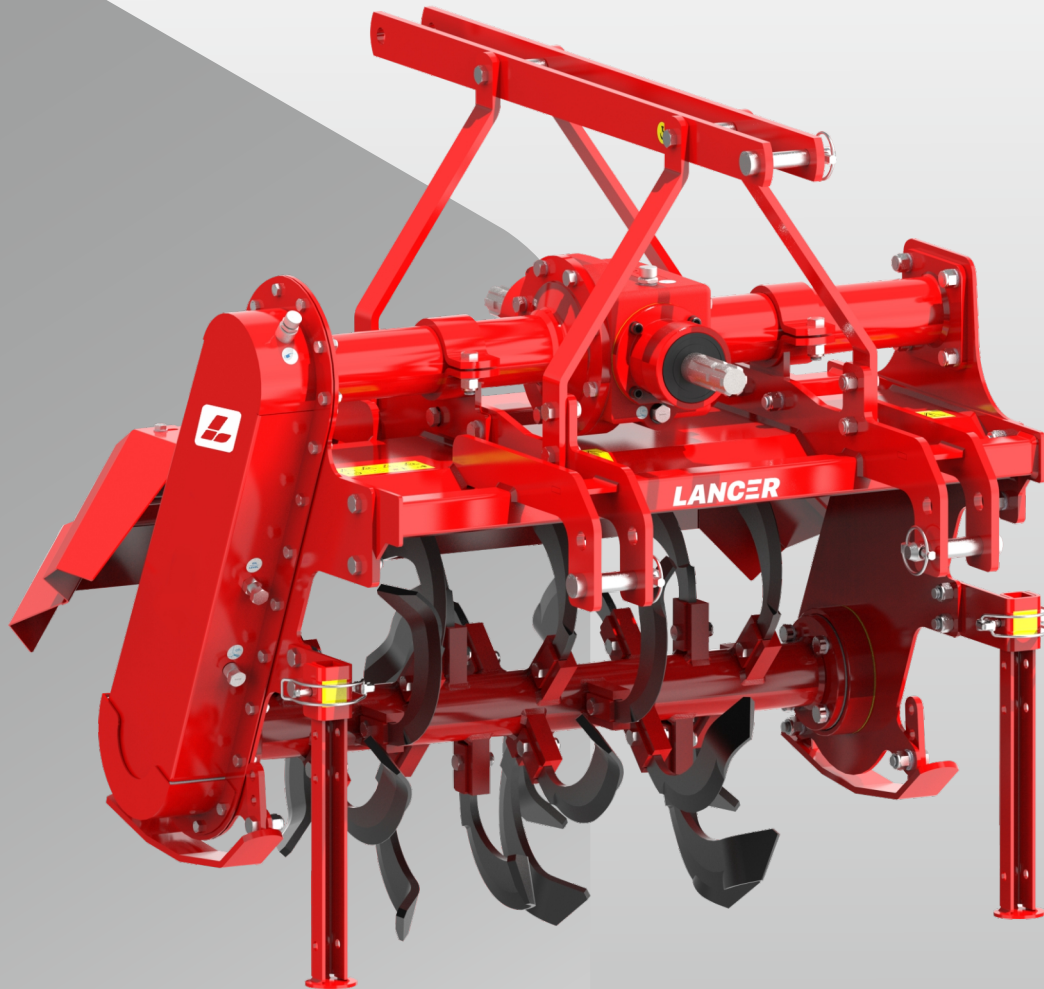

Heavy Chain Driven
Side Transmission



J Type Pocket Blade Holder



Reverse Filled Blades



Two way operable Single
Speed heavy Duty Gearbox



Lancer Rotary Tiller (Rotavator) Reverse Forward (RF) Series is two in one option, mainly for Sugarcane field, where one side is inter cultivation and another side is earthing up activity.

Standard Equipment

- Single Speed Gear Box (For 540 RPM Only).
- J Type Blade
- Chain Driven Side Transmission
- Powder Coated
- Three Point Hitch Cat I.
- Adjustable Depth Skid.
- 258 Rotor RPM.

On Request

- Shear Bolt / Slip Clutch PTO Shaft
- CE PTO Guard



La serie Lancer Rotary Tiller (Rotavator) Reverse Forward (RF) es dos en una opción, principalmente para campos de caña de azúcar, donde un lado es intercultivo y otro lado es actividad de puesta a tierra.

Equipamiento estándar

- Caja de engranajes de una velocidad (solo para 540 RPM).
- Hoja tipo J
- Transmisión lateral accionada por cadena
- Recubierto de polvo
- Enganche de tres puntos Cat I.
- Patín de profundidad ajustable.
- Soporte de elevación ajustable.
- 258 RPM del rotor.

Bajo pedido

- Perno de cizallamiento / Embrague deslizante Eje de la TDF
- Protector de toma de fuerza CE



La série Lancer Rotary Tiller (Rotavator) Reverse Forward (RF) est une option deux en une, principalement pour la canne à sucre, où un côté est interculture et un autre côté est l'activité de mise à la terre.

Équipement standard

- Boîte de vitesses à une vitesse (pour 540 tr / min uniquement).
- Lame de type J
- Transmission latérale entraînée par chaîne
- Couvert de poudre
- Attelage trois points Cat I.
- Skid de profondeur réglable.
- Support de levage réglable.
- 258 tr / min du rotor.


Sur demande

- Boulon de cisaillement / arbre de PDF
- Garde de prise de force CE

Technical Details / Detalles técnicos / Détails techniques

Model	Working Width (Dim. A in mm)	Overall Width (Dim. B in mm)	Overall Length	Overall Height	Power Requirement		Working Depth (mm)	No. of Blades	Weight	
					KW	HP			KG	LBS
RF 80	820	1060	990	970	13-19	18 - 25	150	22	195	430

*Machines weight mentioned without PTO Shaft

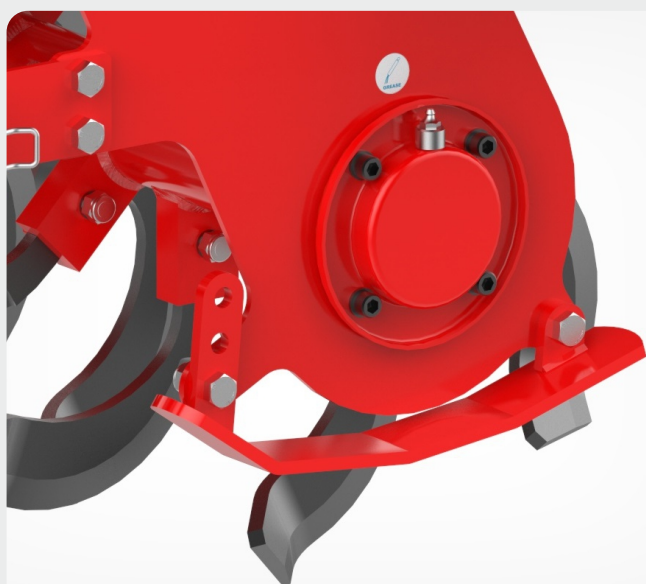

LANCER LASER TECH LTD.

Survey No-1434P/2, Chhatral-Mehsana Highway, Rajpur, Ta-Kadi, Dist. Mehsana, Gujarat, India. 382715.

+912764-278801/02/03/04 sales@lanceragrico.com www.lanceragrico.com +91 88 99 33 55 33

Farmer's Friend



Scan and Get
Main Catalogue